

KN 804 DIGITAL TEMPERATURE CONTROLLER



- FREE VOLTAGE
(AC100~240V(±10%) 50/60Hz, DC 100~300V USED)
- SIZE 100(W)X100(H)X132(D)mm
- 4 SENSOR INPUT(Pt100Ω)
- PROGRAM TYPE FUNCTION
(T.MAX VALUE,SETTING VALUE)
- TEMP,MAX FUNCTION
- DATA STORAGE FUNCTION
(Displayed as Fault)
- FAN AUTO MANUAL FUNCTION




SPECIFICATION

- | | |
|--|--|
| <ul style="list-style-type: none"> ◆ DIMENSION
100(W)X100(H)X132(D)mm ◆ ACCURACY
+/- 0.5℃(Full Scale) ◆ INPUT
4 INPUT Pt100Ω-3Wires (DIN IEC 751) ◆ TEMPERATURE MEASURING RANGE
-50~250℃ ◆ INPUT MEASUREING CYCLE
100m SEC ◆ AMBIENT TEMPERATURE
OPERATION -0to55℃ ◆ AMBIENT HUMIDTIY
OPERATION 10 to 90% RH ◆ TEMPERATURE INDICATION
1℃ ◆ OUTPUT CONTACTS CAPACITY
TRIP,ALARM,FAULT AC 250V 5A (Resistance Load)
FAN AC 250V 10A (Resistance Load)
CONTACT DC 30V 5A (Resistance Load) | <ul style="list-style-type: none"> ◆ DATA STORAGE
10YEARS ◆ POWER SUPPLY
AC100 to 240V(±10%) 50/60Hz,DC100~300V ◆ DIELECTRIC STRENGTH
AC2000V for 1min ◆ POWER CONSUMPTION
10VA ◆ INSULATION RESISTANCE
500V DC 100M ohm Minimum ◆ WEIGHT
750g |
|--|--|


TERMINAL CONNECTION

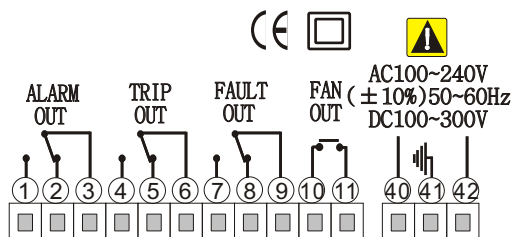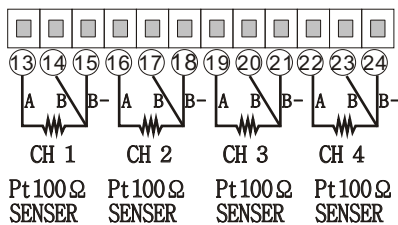

EXTERNAL DIMENSION

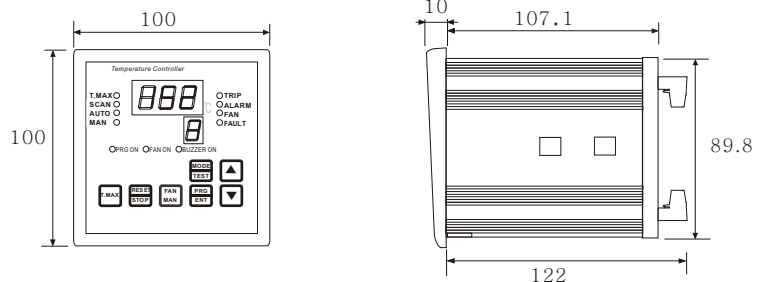

PANEL CUTTING SIZE



※주의※ 제품의 성능향상을 위하여 제품내용 및 사양은 통보없이 변경될 수 있습니다.

※Caution※ Product contents and specifications are subject to change without notice to improve product performance.